


657

The pilot's watch with the captive rotary bezel.

- · Case made of stainless steel, bead-blasted
- Magnetic Field Protection up to 80,000 A / m
- Captive pilot's bezel with minute ratcheting
- · Sapphire crystal glass
- · Nickel-free case back
- Pressure-resistant to 20 bar
- Low pressure resistant

•

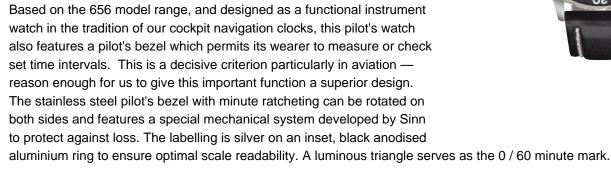





Technical details

Mechanical Movement

The information on the mechanical movement corresponds to the current production situation in Frankfurt am Main. Due to technical changes, it may happen in individual cases that stock items of our sales partners deviate from this information.

- ETA 2824-2
- · Self-winding mechanism
- 25 bearing jewels
- 28,800 semi-oscillations per hour
- Seconds stop function
- Shock resistant as per DIN ISO 1413
- Anti-magnetic as per DIN 8309

Case

- · Case made of stainless steel, bead-blasted
- · Sapphire crystal glass in front, anti-reflective on both sides
- Case back screw-fastened, nickel-free
- Crown screwable
- Meet the technical requirements for waterproofness, as set out in standard DIN 8310
- Pressure-resistant up to 20 bar
- · Low pressure resistant

Functions

- Hours, minutes, seconds
- · Date display
- · Pilot's bezel with minute ratcheting and luminous key mark

SINN Technologies

- · Captive bezel
- Magnetic Field Protection up to 80,000 A/m



Dimensions and Weight

Case diameter: 41 mmBand lug width: 20 mmCase thickness: 12 mm

• Weight without strap: 77 gramme

Dial and Hands

- · Glossy black dial
- Numbers and indices coated with luminescent colour
- Hour and minute hand coated with luminescent colour