


# U200 (EZM 8)

## The mission timer made from German submarine steel.

- Completely made from high-strength seawater-resistant German Submarine Steel
- Bezel with TEGIMENT Technology and therefore especially scratch-resistant
- Ar-Dehumidifying Technology enhances functional reliability and freedom from fogging
- Functionally reliable from -45°C up to +80°C
- Tested based on European diving equipment standards and certified by DNV GL
- Captive diver's bezel with minute ratcheting
- Crown at 4 o'clock to prevent pressure on the back of the hand
- · Sapphire crystal glass
- EZM Design for best readability
- Pressure-resistant to 2,000 m diving depth (200 bar), certified by

a smaller diameter (37 mm) and lower weight – without compromising on functionality!

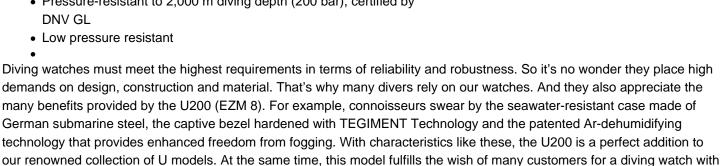





### Technical details

#### **Mechanical Movement**

The information on the mechanical movement corresponds to the current production situation in Frankfurt am Main. Due to technical changes, it may happen in individual cases that stock items of our sales partners deviate from this information.

- ETA 2824-2
- · Self-winding mechanism
- 25 bearing jewels
- 28,800 semi-oscillations per hour
- Seconds stop function
- Shock resistant as per DIN ISO 1413
- Anti-magnetic as per DIN 8309

#### Case

- · Case made of stainless steel, bead-blasted
- Sapphire crystal glass in front, anti-reflective on both sides
- · Case back screw-fastened
- Crown screwable
- Meet the technical requirements for waterproofness, as set out in standard DIN 8310
- Pressure-resistant up to 200 bar, certified by DNV GL
- According to the technical demands for the diving norm DIN 8306
- Tested based on European diving equipment standards EN 250 / EN14143 and certified by DNV GL
- · Low pressure resistant

#### **Functions**

- · Hours, minutes, seconds
- Diver's bezel with minute ratcheting and luminous key mark
- · Date display



#### **SINN Technologies**

- Bezel with TEGIMENT Technology, therefore especially scratch-resistant
- · Captive bezel
- Ar-Dehumidifying Technology enhances functional reliability and freedom from fogging
- Temperature resistance technology, therefore functionally reliable at temperatures from -45°C up to +80°C

#### **Dimensions and Weight**

Case diameter: 37 mm
Band lug width: 18 mm
Case thickness: 14.5 mm

• Weight without strap: 73 gramme

#### **Dial and Hands**

- · Matte black dial
- Indices coated with luminescent colour
- · Hour, minute and second hand coated with luminescent colour
- · Mission timer design for optimal readability